
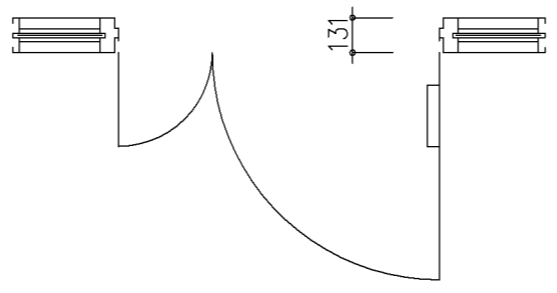
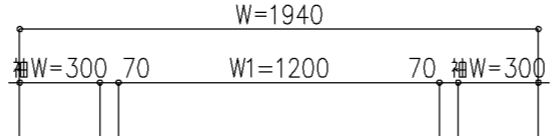


両袖付片開き

設計範囲表




| 設計範囲 | MIN | ~ | MAX |
|-------|------|---|------|
| W | 800 | ~ | 3740 |
| H | 1500 | ~ | 2500 |
| 有効開口W | 500 | ~ | 1000 |
| 袖W | 80 | ~ | 1300 |
| 袖H | 80 | ~ | 2477 |
| 扉厚 | 50 | ~ | 100 |

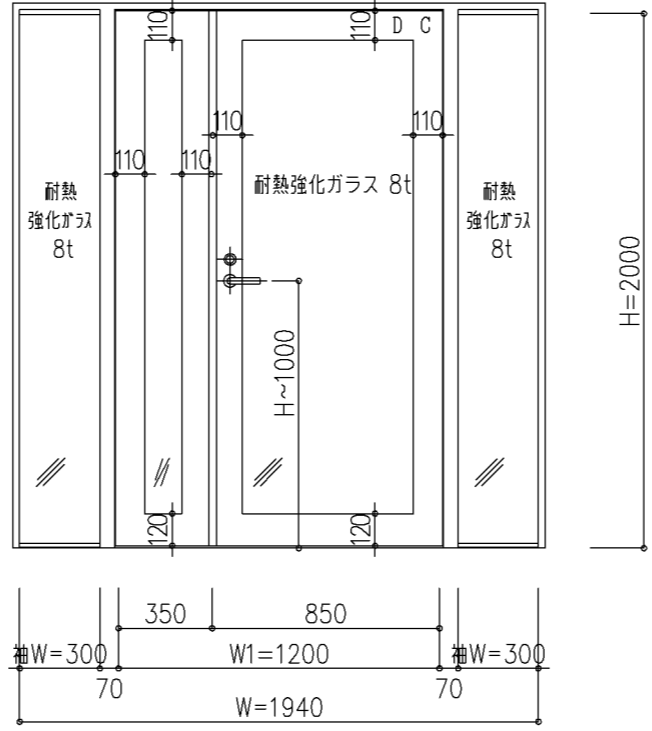

両袖付親子開き

設計範囲表

| 設計範囲 | MIN | ~ | MAX |
|-------|------|---|------|
| W | 1200 | ~ | 4340 |
| H | 1500 | ~ | 2500 |
| 有効開口W | 900 | ~ | 1600 |
| 袖W | 80 | ~ | 1300 |
| 袖H | 80 | ~ | 2477 |
| 親W | 500 | ~ | 1000 |
| 子W | 400 | ~ | 600 |
| 扉厚 | 50 | ~ | 100 |

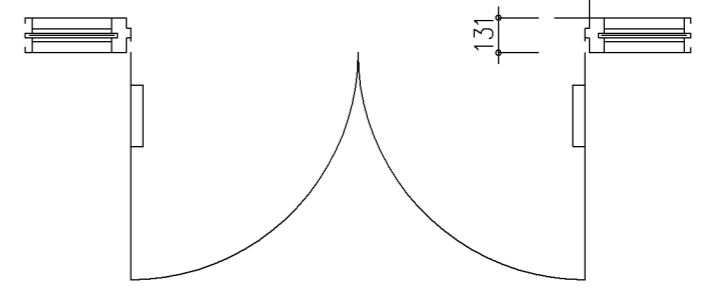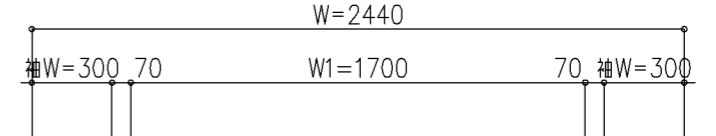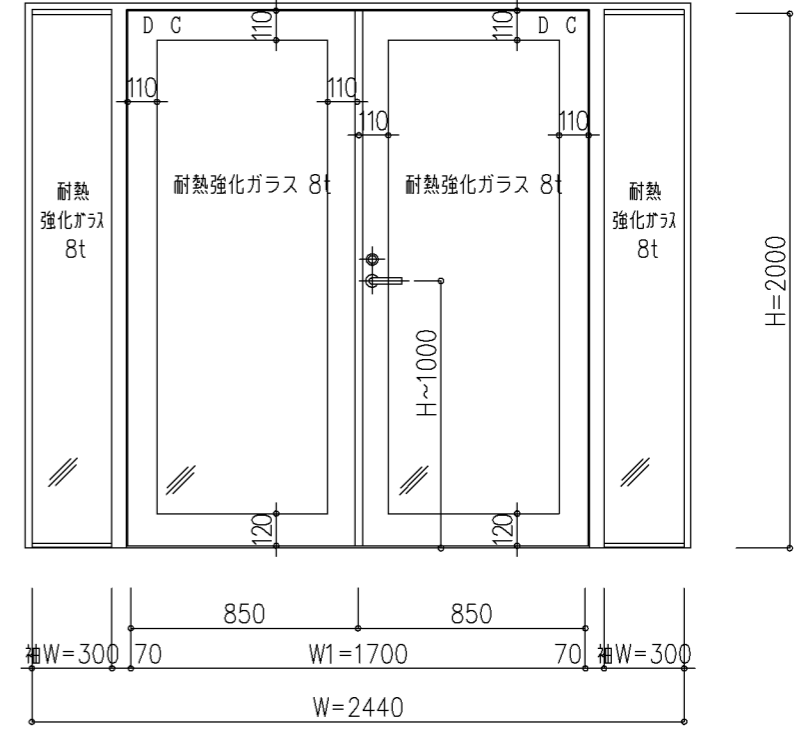

両袖付両開き

設計範囲表

| 設計範囲 | MIN | ~ | MAX |
|-------|------|---|------|
| W | 1300 | ~ | 4740 |
| H | 1500 | ~ | 2500 |
| 有効開口W | 1000 | ~ | 2000 |
| 袖W | 80 | ~ | 1300 |
| 袖H | 80 | ~ | 2477 |
| 扉厚 | 50 | ~ | 100 |